


Габаритный чертеж

Напряжение питания	Применяемый стандартный электродвигатель (кВт)	Модель инвертора	Наружные размеры (мм):					Монтажные размеры (мм):						
			№ чертежа	W	H	D	D 1	D 2	№ чертежа	W1	W2	H1	H2	
3-фазное 400 ВА	0.75	FRN0.75AQ1□-4E	A	150	465	262	162	100	B	115	17.5	451	7	
	1.5	FRN1.5AQ1□-4E												
	2.2	FRN2.2AQ1□-4E												
	3.7	FRN3.7AQ1□-4E												
	5.5	FRN5.5AQ1□-4E												
	7.5	FRN7.5AQ1□-4E												
	11	FRN11AQ1□-4E												
	15	FRN15AQ1□-4E												
	18.5	FRN18.5AQ1□-4E												
	22	FRN22AQ1□-4E												
	30	FRN30AQ1□-4E												203
	37	FRN37AQ1□-4E												
	45	FRN45AQ1□-4E												
	55	FRN55AQ1□-4E		265	736	285								
	75	FRN75AQ1□-4E												
	90	FRN90AQ1□-4E		300	888	370								
	110	FRN110AQ1#-4E												
	132	FRN132AQ1#-4E												
	160	FRN160AQ1#-4E												
	200	FRN200AQ1#-4E												
	220	FRN220AQ1#-4E												
280	FRN280AQ1#-4E													
315	FRN315AQ1#-4E													
355	FRN355AQ1#-4E													
400	FRN400AQ1#-4E													
500	FRN500AQ1#-4E													
630	FRN630AQ1#-4E													
710	FRN710AQ1#-4E													

□ (Класс защиты): М : IP21, L : IP55

(Класс защиты): IP00

Корпус

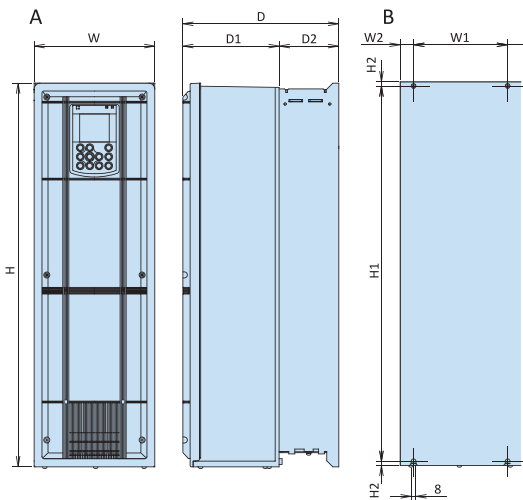

Клавиатура

