


Габаритный чертеж

Напряжение питания	Применяемый стандартный электродвигатель (кВт)	Модель инвертора	Наружные размеры (мм):					Монтажные размеры (мм):					
			№ чертежа	W	H	D	D 1	D 2	№ чертежа	W1	W2	H1	H2
3-фазное 400 ВА	0,75	FRN0.75AR1 □ -4E	A	150	465	262	162	100	B	115	17,5	451	7
	1,5	FRN1.5AR1 □ -4E											
	2,2	FRN2.2AR1 □ -4E											
	3,7	FRN3.7AR1 □ -4E											
	5,5	FRN5.5AR1 □ -4E											
	7,5	FRN7.5AR1 □ -4E											
	11	FRN11AR1 □ -4E											
	15	FRN15AR1 □ -4E											
	18,5	FRN18.5AR1 □ -4E											
	22	FRN22AR1 □ -4E											
	30	FRN30AR1 □ -4E											
	37	FRN37AR1 □ -4E											
	45	FRN45AR1 □ -4E											
	55	FRN55AR1 □ -4E											
	75	FRN75AR1 □ -4E											
	90	FRN90AR1 □ -4E											
	110	FRN110AR1 # -4E	203	585	262	162	100	158	22,5	571	7		
	132	FRN132AR1 # -4E											
	160	FRN160AR1 # -4E											
	200	FRN200AR1 # -4E											
	220	FRN220AR1 # -4E											
280	FRN280AR1 # -4E												
315	FRN315AR1 # -4E	203	645	262	162	100	158	22,5	631	7			
355	FRN355AR1 # -4E												
400	FRN400AR1 # -4E												
500	FRN500AR1 # -4E	265	736	285									
630	FRN630AR1 # -4E												
710	FRN710AR1 # -4E	300	888	370									

□ (Класс защиты): M : IP21, L : IP55

(Класс защиты): IP00

■ Корпус

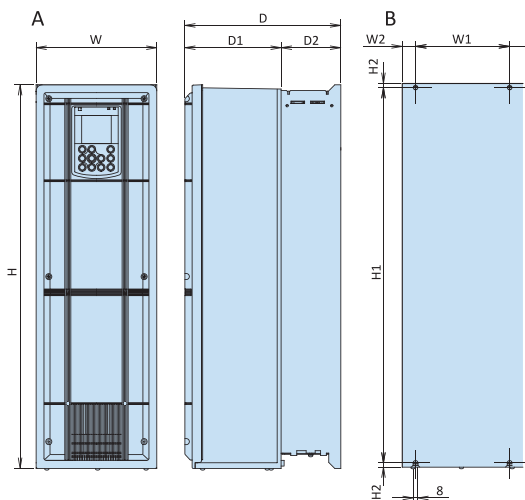

■ Клавиатура

